




Inslaganker Inox

The wall tie anchor with Impact Thread is a robust fastening anchor designed for reliable anchoring in solid brick and concrete substrates. Its unique wave profile and impact thread provide strong holding power, making it ideal for quick and stable installations.

1.4362 stainless steel

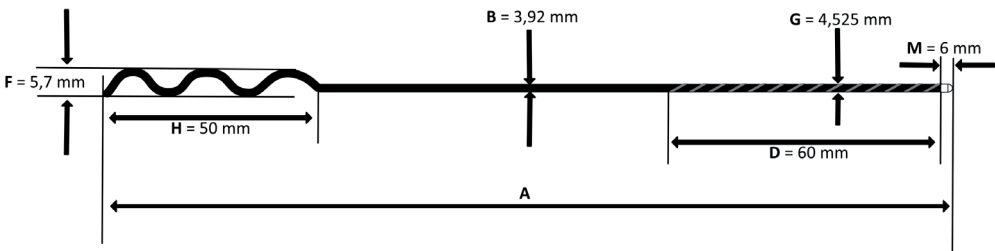

A: Length (+2 mm / -2 mm) | B: Thickness 3,92 mm (+0 mm / -0,03 mm) | D: Thread length 60 mm (+5 mm / -5 mm)
F: Height of wave 5,7 mm (+0,3 mm / -0,3 mm) | G: Thread outer diameter 4,525 mm (+0,075 mm / -0,075 mm)
H: Wave length 50 mm (+2 mm / -2 mm) | M: Crest length 6 mm (+1 mm / -1 mm)

Art. No.	Product description	Dimension	VPE
1260559	Inslaganker inox A2 - 200 mm (250 st)	4 x 200 mm	250
1260560	Inslaganker inox A2 - 220 mm (250 st)	4 x 220 mm	250
1260561	Inslaganker inox A2 - 240 mm (250 st)	4 x 240 mm	250
1260562	Inslaganker inox A2 - 250 mm (250 st)	4 x 250 mm	250
1260563	Inslaganker inox A2 - 260 mm (250 st)	4 x 260 mm	250
1260564	Inslaganker inox A2 - 280 mm (250 st)	4 x 280 mm	250
1260565	Inslaganker inox A2 - 300 mm (250 st)	4 x 300 mm	250
1260566	Inslaganker inox A2 - 320 mm (250 st)	4 x 320 mm	250
1260567	Inslaganker inox A2 - 340 mm (250 st)	4 x 340 mm	250
1260568	Inslaganker inox A2 - 360 mm (250 st)	4 x 360 mm	250
1260569	Inslaganker inox A2 - 380 mm (250 st)	4 x 380 mm	250
1260570	Inslaganker inox A2 - 400 mm (200 st)	4 x 400 mm	200